



**AIRSTAR**



THE ALL-IN-ONE



**Crystal Pixel Color Dynamic White**



# Crystal Pixel Color Dynamic White



## Technical data

Lighted area	1,700 m <sup>2</sup> / 18,300 ft <sup>2</sup>			
Light under the balloon	110 lux (4m - 13 ft high)			
Flicker	3.1 kHz			
LED Lifetime	50,000 hrs			
	Dynamic White		Colors	Full
	wW	cW	RGBA	Whites + Colors
Color temperature	3000 K	6500 K	/	4300 K
CRI	80	80	/	90
Luminous flux	25,000 lm	15,000 lm	9,000 lm	42,000 lm
Power consumption	204 W	132 W	120 W	420 W
Power Supply	100~240 VAC   50-60 Hz   Recommended generator 1 kVA			

Battery input - 52V / Backup power

 **PowerSwitch** (optional)

**New!**

Provides flexibility in use and installation, while ensuring safety (continuity in case of power failure) and the serenity of your events.

Envelope diameter

90 cm (3 ft), 130 cm (4 ft), 160 cm (5 ft), 200 cm (6.5 ft)

Wind resistance

Up to 80 km/h (49 mph)

Set-up time

5 minutes

Inflation

Fast and self-regulated inflation

Noise level

3 modes: silent, standard, high wind

Net weight of the balloon with envelope

From 11 kg (24 lb) to 12 kg (27 lb)

Certifications

CE, IP 54

Light source

Airstar LED Matrix : 12 macro-pixels (RGBAwWcW)

Mesh network balloons

100 m (109 yd) between each balloon

Light controls


> via the **control panel on the product**

> Remotely via the **Airstar Light app**

> **DMX**

- DMX profiles available for major control surfaces
- 5-pin DMX connectors & CRMX
- Macro mode: 4 to 16 channels
- Pixel mode: 6 pixels/2 colors for 14 channels

## Illumination

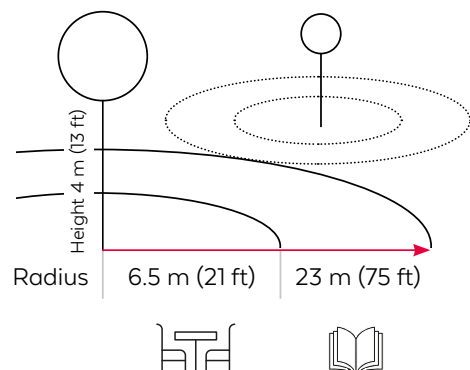

## Packaging

Shock-proof wheeled case  
 Dimensions : 81 x 47 x 35 cm  
 31 x 18 x 13 in  
 Total weight: less than 23 kg (50 lb)



## Accessories

Various stands  
 Stand cover, black or white  
 Sandbags  
 Suspension kit  
 Guying kit

## Customisation

Vinyl graphics  
 Coloured slipcovers  
 Digitally printed envelopes

## Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons

10 light animations available

