


AIRSTAR



Crystal Prime White



Crystal Prime White



Technical data

Lighted area	2,000 m ² / 22,000 ft ²
Color temperature	Neutral white : 4,000 K
CRI	70
Flicker	3.1 kHz
Luminous flux	66,000 lm
LED lifetime	50,000 h
Power consumption	430 W
Power supply	100~240 VAC 50-60 Hz Recommended generator 1 kVA

Battery input - 52V /
Backup power

PowerSwitch (optional)


New!



Provides flexibility in use and installation, while ensuring safety (continuity in case of power failure) and the serenity of your events.

Envelope diameter	130 cm (4 ft)
Wind resistance	Up to 80 km/h (49 mph)
Set-up time	2 minutes
Inflation	Fast and self-regulated inflation
Net weight of the balloon with envelope	Less than 7 kg (15 lb)
Certifications	CE, IP 54
Light source	Airstar LED Matrix : 12 macro-pixels
Mesh network balloons	100 m (109 yd) between each balloon
Light controls	> Via the push-button on the product > Remotely via the Airstar Light app

Illumination

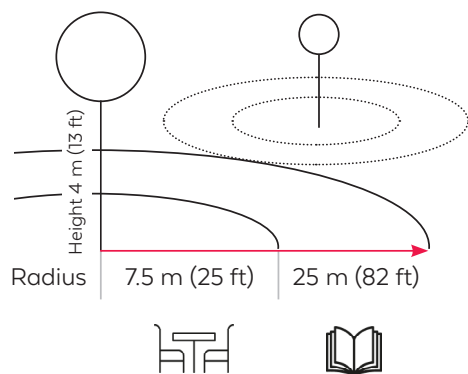

Packaging

Shock-proof wheeled case
Dimensions : 91 x 35 x 35 cm
36 x 14 x 14 in
Total weight: less than 8 kg (18 lb)



Accessories

Various stands
Stand cover, black or white
Sandbags
Suspension kit
Guying kit

Customisation

Vinyl graphics
Coloured slipcovers
Digitally printed envelopes

Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons



7 light animations available

